


TANlock – The Access Control System

Datasheet TANlock Zero Remote



TANlock Zero Remote

- Easy integration into existing locking systems and industrial controls
- Digital signal in- and outputs with broad voltage range (inputs: 3.3 - 5 V; outputs: 3.3 - 24 V)
- Connection option for two door contacts
- External power supply (5 - 24 V)
- Galvanic isolation of inputs and outputs
- Simple installation - no additional hardware required
- Housing made of high-quality die-cast zinc
- Elegant design in black or silver
- High-quality powder coating of the locks
- Optional IP54 or IP65 possible

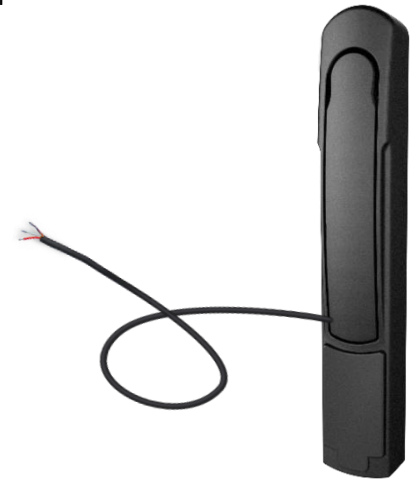

Input:

- TANlock open

Output:


- TANlock closed
- Lever is in closed position (optional: door contact closed)

Dimensions and weight

Length	235,55 mm
Width	40,00 mm
Hight	29,23 mm
Weight	695 g

Mounting Server Cabinet

- Necessary cut outs:
2x 50 mm x 25 mm or
1x 150 mm x 25mm
- Fixation by using the clamp
and the supplied screw
- Fixation of the delivered cam lock
housing using the supplied
screws

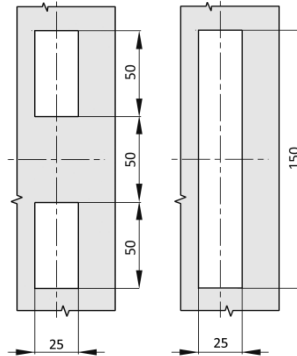

Distribution package: TANlock, assembly set, instructions

Contact:

FATH Mechatronics GmbH
Gewerbepark Hügelmühle 31
91174 Spalt

T +49(0)9175 7909-152

www.tanlock.com
info@tanlock.com