

### TANlock Zero Touch

- Easy integration into existing locking systems and industrial controls
- Touchdisplay as code lock for authentication
- Two serial interfaces, one of which can optionally be reconfigured as a simple switching input (3.3 - 5 V)
- Various serial protocols (Wiegand 26/34, others on request)
- Connection option for two door contacts
- External power supply (5 - 24 V)
- Galvanic isolation of inputs and outputs
- Simple installation - no additional hardware required
- Housing made of high-quality die-cast zinc
- Elegant design in black or silver
- High-quality powder coating of the locks
- Optional IP54 or IP65 possible



### Anschlussmöglichkeiten:

- Two serial interfaces  
The lock is considered as two independent components - lever and code lock. Both are independently controlled via their own serial interface.
- Single serial interface  
The lock is seen as one unit - lever and code lock integrated. Both are controlled together via a serial interface.
- Mixed control - serial and digital  
The lock is considered as two independent components - lever and code lock. The lever can be unlocked via a digital input. The code lock is controlled via its own serial interface.

*Different versions of the serial interface possible. Please contact us.*

### Authentication operating modes:

- Independent  
The permitted codes are stored directly in the code lock. A central control unit is not necessary.
- Central controlled  
The code inputs are transferred to a central system via the serial interface. This decides whether the lever should be unlocked or not.

# TANlock – The Access Control System

## Datasheet TANlock Zero Touch




### Dimensions and weight

Length	235,55 mm
Width	40,00 mm
Height	29,23 mm
Weight	695 g

### Mounting Server Cabinet

- Necessary cut outs:  
2x 50 mm x 25 mm or  
1x 150 mm x 25mm
- Fixation by using the clamp  
and the supplied screw
- Fixation of the delivered cam lock  
housing using the supplied screws

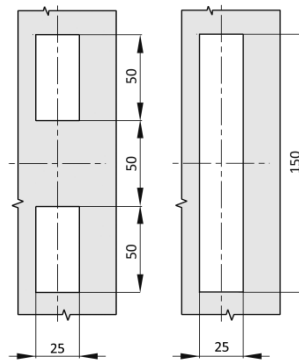

**Distribution package:** TANlock, assemblyset, instructions

### Contact:

**FATH** Mechatronics GmbH  
Gewerbepark Hügelmühle 31  
91174 Spalt

T +49(0)9175 7909-152

[www.tanlock.com](http://www.tanlock.com)  
[info@tanlock.com](mailto:info@tanlock.com)